

HTL 2840

Min.
100mm

1900mm
Max.

4000kg
Capacity

4.0 Ton Two-post Lift with Base

Automatic solenoid lock release



CE EAC

HR
HAUVREX
www.hauvrex.com

Technical Features



Control

24V low voltage control box with UP, LOCK, MAIN POWER SWITCH and emergency stop button



Lifting Arms

Asymmetric 2+3 stages lifting arms increasing overall arm positioning for lifting a variety of different wheel base vehicles



Lifting Pad

Drop-in type lifting arm pad



Arm Locks

Automatic arm locking during lifting and automatic unlock when the arm reaches the floor



Height Adaptor

Included 85mm height truck & van adaptors ideals for trucks & vans with running boards or auxiliary fuel tanks




Arm Holder

C-type enclosed arm holder gives more strength and safety



Foot Protection


Lifting arms equipped with foot protection bars



Door Protection

Anti-collision door protection rubber on carriages

Technical Drawing

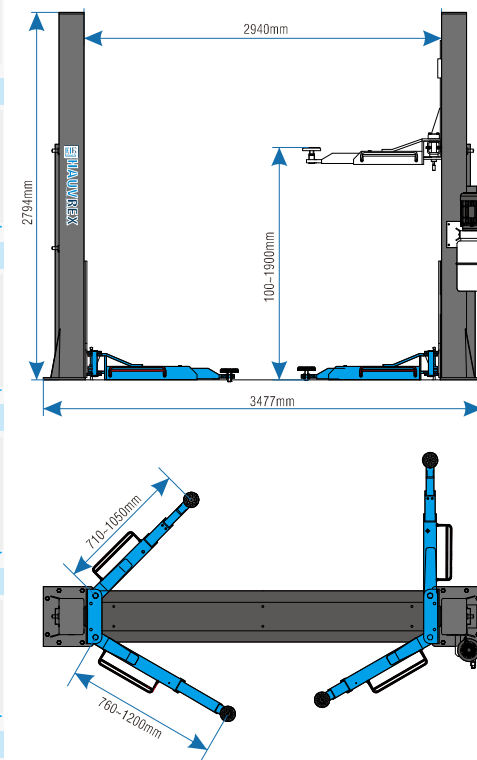

Technical Data

Lifting Capacity	4,000kg
Min. Height	100mm
Max. Lifting Height	1,900mm
Overall Height	2,794mm
Overall Width	3,477mm
Width between Posts	2,940mm
Short Arm Length	710-1,050mm
Long Arm Length	760-1,200mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph