

4.0 Ton Clear Floor Two-post Lift


Automatic solenoid lock release, double piece column



Technical Features

	Control 24V low voltage control box with UP, DOWN, LOCK, MAIN POWER SWITCH
	Lifting Arms Asymmetric 2-stage lifting arms
	Lifting Pad Drop-in type double threaded lifting arm pad
	Arm Locks Automatic arm locking during lifting and automatic unlock when the arm reaches the floor
	Arm Holder C-type enclosed arm holder give more strength and safety
	Foot Protection Lifting arms equipped with foot protection bars
	Door Protection Anti-collision door protection rubber on carriages
	Overhead Protection Padded overhead protection bar automatically stops the lift should a vehicle come in contact with overhead structure.

Technical Drawing

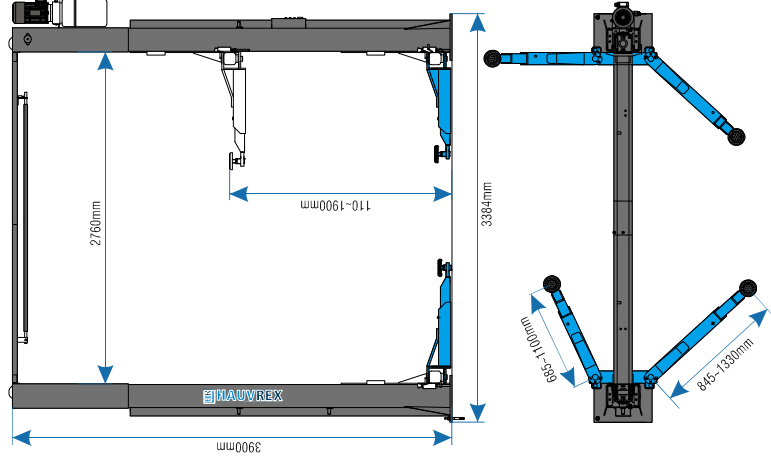

Technical Data

Lifting Capacity	4,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	3,900mm
Overall Width	3,384mm
Width between Posts	2,760mm
Short Arm Length	685-1,100mm
Long Arm Length	845-1,330mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	2.2KW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph