

**HTL****3450/3460****Min.  
110mm****Max.  
1900mm****Capacity  
5000/6000kg**

## 5.0/6.0 Ton Clear Floor Two-post Lift

Automatic lock release, double piece column

**CE EAC**

### Technical Features

**Control**

24V low voltage control box with UP, LOCK and MAIN POWER SWITCH

**Lifting Arms**


Asymmetric 3+3 stages lifting arms

**Lifting Pad**

Drop-in type dual stage lifting arm pad

**Arm Locks**

Automatic arm locking during lifting and automatic unlock when the arm reaches the floor

**Arm Holder**

C-type enclosed arm holder give more strength and safety

**Foot Protection**

Lifting arms equipped with foot protection bars



**Door Protection**

Anti-collision door protection rubber on carriages

**Overhead Protection**

Padded overhead protection bar automatically stops the lift should a vehicle come in contact with overhead structure.

### Technical Drawing

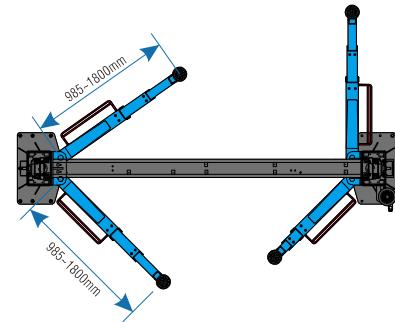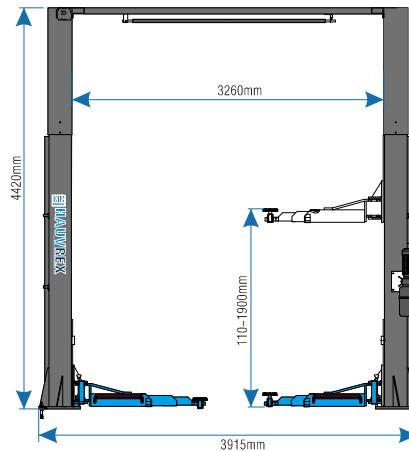

### Technical Data

Lifting Capacity	5,000kg/6,000kg
Min. Height	110mm
Max. Lifting Height	1,900mm
Overall Height	4,420mm
Overall Width	3,915mm
Width between Posts	3,260mm
Lifting Arm Length	985-1,800mm
Lifting/Lowering Time	55Sec./45Sec.
Motor Power	3.0kW
Power Supply	380V/50Hz/3Ph 220V/50Hz/1Ph